

Absorbant Glass Mat (AGM) technology for superior performance. Valve regulated, spill proof construction allows safe operation in any position. Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified. U.L. recognized under file number MH 20567.

Specification

Nominal Voltage		12 volts (6 cells)	
Nominal Capacity			
20-hr. (0.75A)		15.0 Ah	
10-hr. (1.40A)		14.0 Ah	
5-hr. (2.55A)		12.8 Ah	
1-hr. (9.00A)		9.00 Ah	
Approximate Weight		9.2 lbs. (4.2 kg)	
Internal Resistance (approx.)		18mΩ	
Shelf Life (% of normal capacity at 68° F (20° C)			
3 Months		6 Months	
91%		83%	
		12 Months	
		64%	
Temperature Dependency of Capacity		(20 hour rate)	
104° F (40°C)		77° F (25°C)	
102%		100%	
		85%	
		65%	
AGM Operational Temperature			
Charge		32°F to 104°F (0°C to 40°C)	
Discharge		5°F to 113°F (-15°C to 45°C)	
AGM Storage Temperature		5°F to 104°F (-15°C to 40°C)	




Due to continuous improvements to our products, product may vary slightly from depiction.

Charge Method (Constant Voltage)

Cycle Use (Repeating Use)


Initial Current	4.5 A or smaller
Control Voltage	14.6 - 14.8 V
Float Use	
Control Voltage	13.6 - 13.8 V

Physical Dimensions: in (mm)




L: 6.00 in (152 mm)
W: 3.90 in (99.0 mm)
H: 3.80 in (96.0 mm)
TH: 4.10 in (104 mm)
Tolerances are +/- 0.04 in. (+/- 1 mm) and +/- 0.08 in. (+/- 2 mm) for height dimensions. All data subject to change without notice.

Terminals

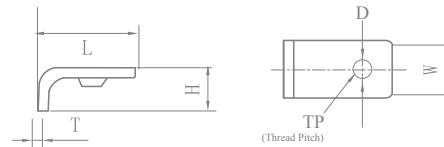






Type	Dimension	L	W	H	D	TP
0.31 inch tab with a hole for a 4mm screw		12.8	7.8	5.00	4.00	0.70

Discharge Time vs. Discharge Current

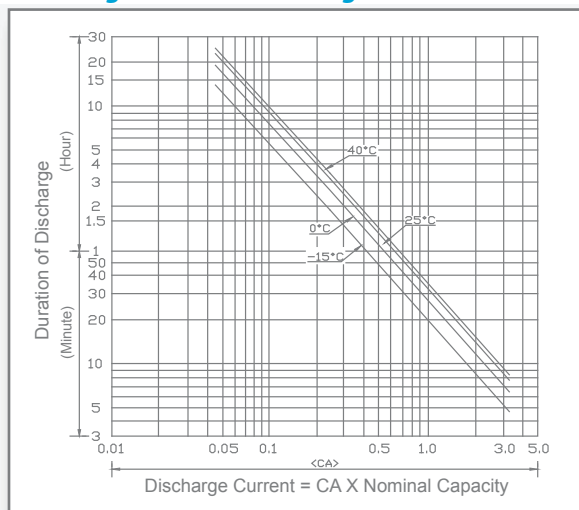

Discharge Characteristics

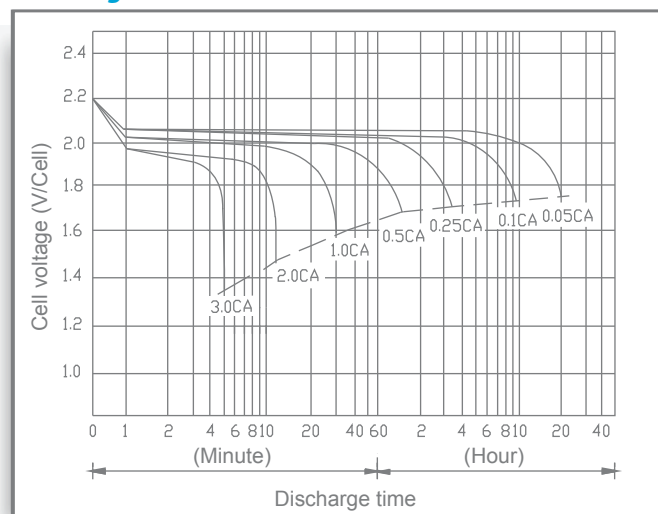

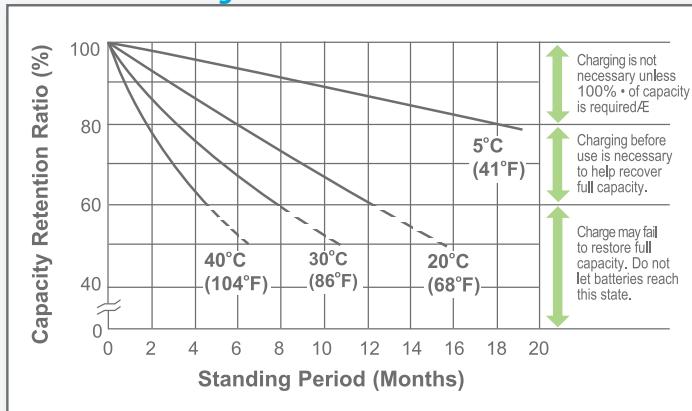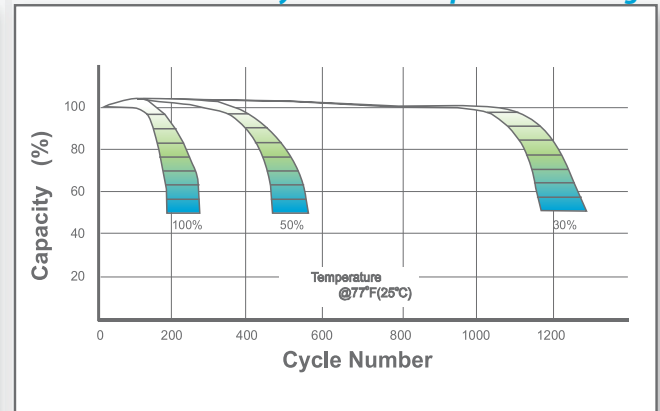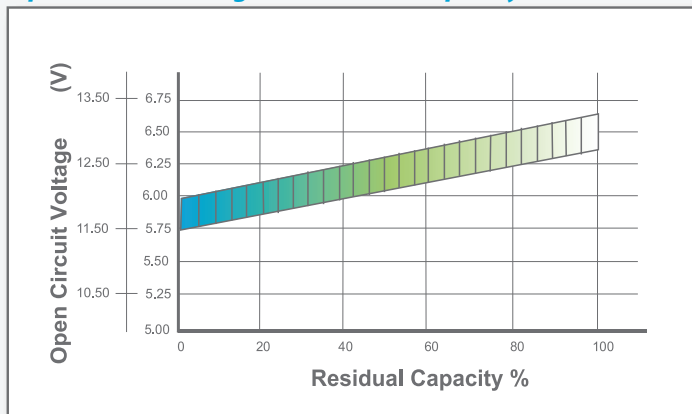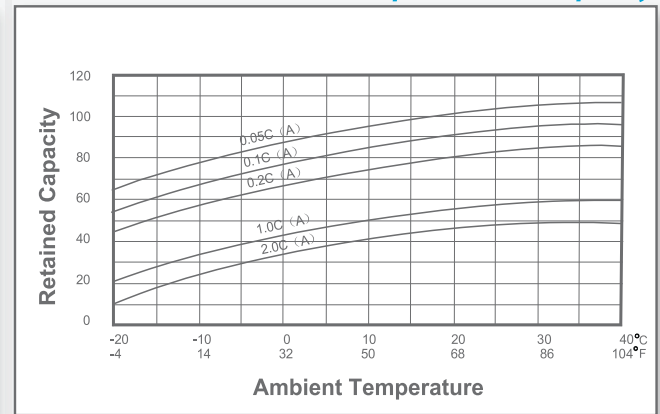Shelf Life & Storage**Cycle Life vs Depth of Discharge****Open Circuit Voltage vs Residual Capacity****Effect of Temperature on Capacity****Charge Current & Final Discharge Voltage**

Application	Charge Voltage(V/Cell)			Max.Charge Current	Final Discharge Voltage V/Cell	1.75	1.70	1.60	1.30
	Temperature	Set Point	Allowable Range						
Cycle Use	25°C (77°F)	2.45	2.40~2.50	0.30C	Discharge Current(A)	0.2C>(A)	0.2C<(A)<0.5C	0.5C<(A)<1.0C	(A)>1.0C
Standby	25°C (77°F)	2.30	2.27~2.30						