



# AP SERIES POWERSPORTS BATTERIES PREMIUM DRY CHARGED AGM

UPG No. 43037

## APVIX30L-BS

Equivalent to YIX30L-BS

### Specification


Nominal Voltage	12 Volts
Nominal Capacity (10H-R)	30 Ah
CCA	450
Approximate Weight (With Acid)	23.90 lbs (10.85 kgs)
Recommended Maximum Charging Current	3 A
Maximum Charging Voltage	14.8 VDC/unit Average at 25°C
Terminal Type	X
Warranty	1 Year Full Replacement

### Physical Dimensions: in (mm)

L: 6.54 (166) W: 5.00 (127)H: 6.89 (175)



Due to continuous improvements to our products, product may vary slightly from depiction.

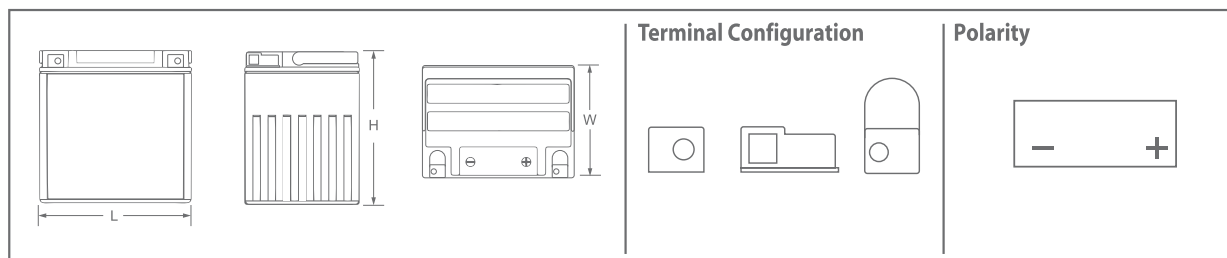

Front



Side



Terminals

### Filling Instructions

- Before filling, ensure your new battery is the correct size for your vehicle. Once the battery is filled, it cannot be returned to vendor.
- Only use the acid pack that comes with your battery.
- Remove the sealing plugs from electrolyte cells on the battery.
- Remove filler cap strip from electrolyte bottle to expose silver foils. DO NOT remove silver foils.
- Push the bottle down into the cells piercing the seals. Fill your battery with all the contents of the acid pack.
- The bottle contains the exact amount of electrolyte needed for the battery. DO NOT add water.
- After the filling, replace the sealing plugs on each battery cell. Do not remove the sealing plugs for charging.

### Charging Instructions

- Charge the battery fully before installing.
- Never charge the battery with a charger that delivers more than 3.0 amps of current. Larger chargers will harm the battery.
- For optimum performance, Kinetik® recommends charging and maintaining with the Adventure Power® Maintainer 2000 battery charger.
- This charger maintainer can remain connected to the battery indefinitely.

Kinetik® and Adventure Power® are registered trademarks of Universal Power Group, Inc.

[www.kinetikpower.com](http://www.kinetikpower.com) All specifications are subject to change without notice. UPG is ISO 9001 Certified. [www.upgi.com](http://www.upgi.com)

488 S. Royal Lane | Coppell, Texas 75019 | P 469.892.1122 | T 866.892.1122 | F 469.892.1123 | [sales@apbatteries.com](mailto:sales@apbatteries.com)

U1503-1