

Specification

Nominal Voltage		6 volts	
Nominal Capacity		77° F (25° C)	
20-hr.	(0.23A)	4.50 Ah	
10-hr.	(0.42A)	4.19 Ah	
5-hr.	(0.77A)	3.83 Ah	
1-hr.	(2.70A)	2.70 Ah	
Approximate Weight		1.59 lbs (0.7 kg)	
Internal Resistance (approx.)		18mΩ	
Shelf Life (% of normal capacity at 68° F (20° C)			
3 Months		6 Months	12 Months
91%		83%	64%
Temperature Dependency of Capacity			(20 hour rate)
104° F (40°C)	77° F (25°C)	32° F (0°C)	5° F (-15°C)
102%	100%	85%	65%
AGM Operational Temperature			
Charge		32°F to 104°F (0°C to 40°C)	
Discharge		5°F to 113°F (-15°C to 45°C)	
AGM Storage Temperature		5°F to 104°F (-15°C to 40°C)	



Due to continuous improvements to our products, product may vary slightly from depiction.

Charge Method (Constant Voltage)


Cycle Use (Repeating Use)

Initial Current	1.35 A or smaller
Control Voltage	7.30-7.40 V


Float Use

Control Voltage	6.80-6.90 V
-----------------	-------------


Physical Dimensions: in (mm)



L: 2.78 in (70.6 mm)
W: 1.88 in (47.8 mm)
H: 3.98 in (101 mm)
TH: 4.18 in (106 mm)
 Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.




Terminals

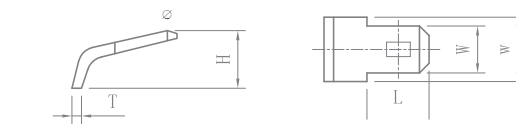


Dimension Type	L	W	w	H	T
F1	6.50	4.75	6.00	5.00	0.80


Discharge Time vs. Discharge Current

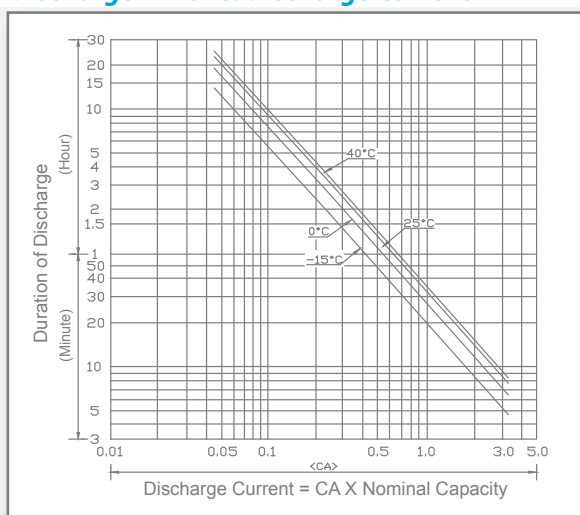


Discharge Characteristics

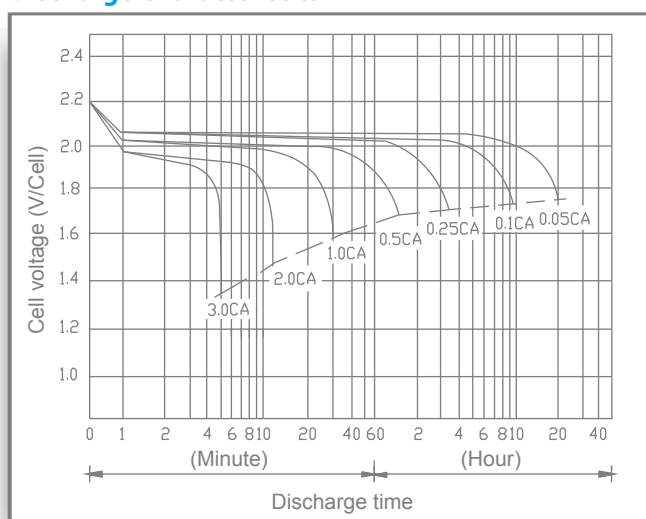


Shelf Life & Storage

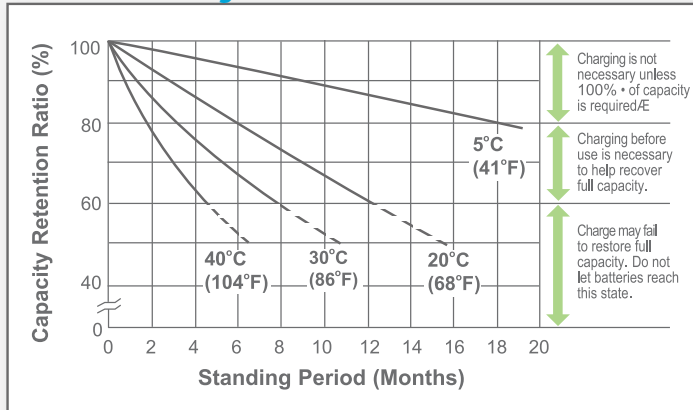


Cycle Life vs Depth of Discharge

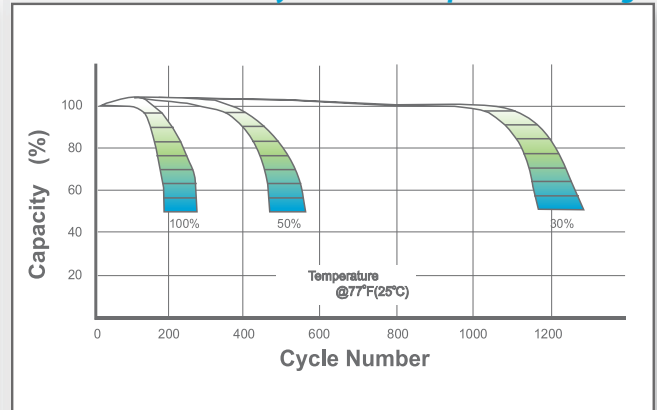

Open Circuit Voltage vs Residual Capacity

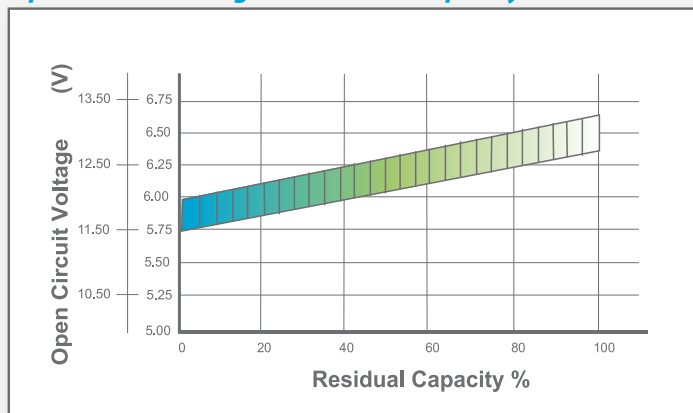

Effect of Temperature on Capacity

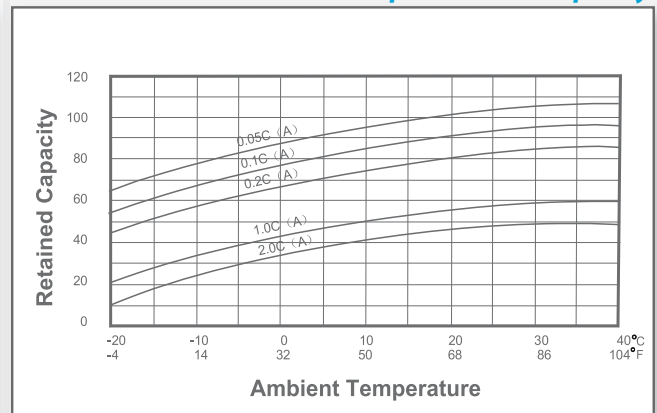

Charge Current & Final Discharge Voltage

Application	Charge Voltage(V/Cell)			Max.Charge Current	Final Discharge Voltage V/Cell	1.75	1.70	1.60	1.30
	Temperature	Set Point	Allowable Range						
Cycle Use	25°C(77°F)	2.45	2.40~2.50	0.30 C	Discharge Current(A)	0.2C>(A)	0.2C<(A)<0.5C	0.5C<(A)<1.0C	(A)>1.0C
Standby	25°C(77°F)	2.30	2.27~2.30						