

UPG Sealed Lead-Acid Battery

STAY POWERED®

Absorbant Glass Mat (AGM) technology for superior performance. Valve regulated, spill proof construction allows safe operation in any position. Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified. U.L. recognized under file number MH 20567.

UPG No. D5778

UB6120

Maintenance-Free

Specification

Nominal Voltage		6 volts	
Nominal Capacity		77° F (25° C)	
20-hr.	(0.60A)	12.0 Ah	
10-hr.	(1.12A)	11.2 Ah	
5-hr.	(2.04A)	10.2 Ah	
1-hr.	(7.20A)	7.20 Ah	
Approximate Weight		4.18 lbs (1.89kgs)	
Internal Resistance (approx.)		12mΩ	
Shelf Life (% of normal capacity at 68° F (20° C))			
3 Months		6 Months	12 Months
91%		83%	64%
Temperature Dependency of Capacity			(20 hour rate)
104° F (40°C)	77° F (25°C)	32° F (0°C)	5° F (-15°C)
102%	100%	85%	65%
AGM Operational Temperature			
Charge		32°F to 104°F (0°C to 40°C)	
Discharge		5°F to 113°F (-15°C to 45°C)	
AGM Storage Temperature		5°F to 104°F (-15°C to 40°C)	



Due to continuous improvements to our products, product may vary slightly from depiction.

Charge Method (Constant Voltage)


Cycle Use (Repeating Use)

Initial Current	3.6 A or smaller
Control Voltage	7.3 - 7.4 V

Float Use

Control Voltage	6.8 - 6.9 V
-----------------	-------------


Physical Dimensions: in (mm)



L: 5.94 in (151 mm)
W: 1.94 in (49.3 mm)
H: 3.70 in (94.0 mm)
TH: 3.94 in (100 mm)
 Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.


Terminals

F Series (Faston Tabs)




Dimension Type	L	W	w	H	T
F2	7.80	6.35	7.80	6.00	0.80

Discharge Time vs. Discharge Current

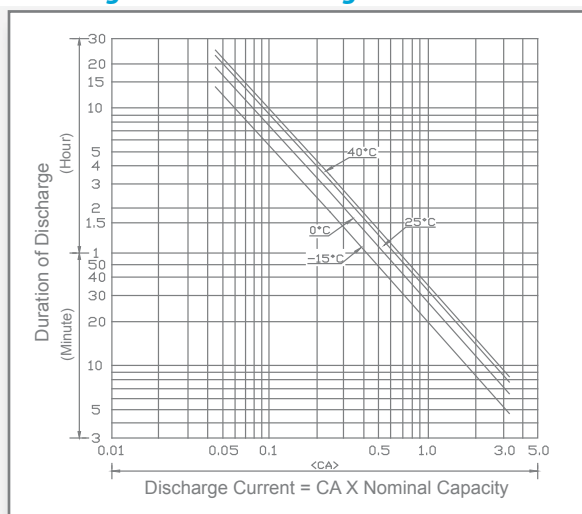

Discharge Characteristics

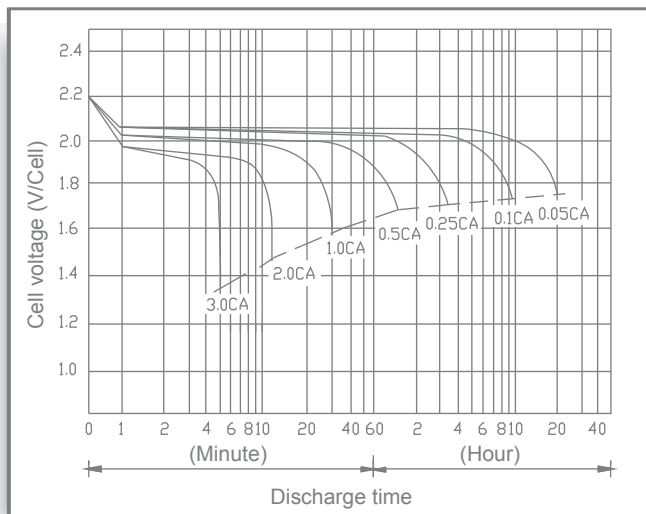

www.upgi.com

All specifications subject to change without notice.

UPG
STAY POWERED®

UPG is ISO Certified





120 Dividend Dr. Ste 100
Coppell, TX 75019

Main 469.892.1122
Toll Free 866.892.1122

Fax 469.892.1123
sales@upgi.com

Copyright © 2023 Universal Power Group Inc. All rights reserved.

J2017-2

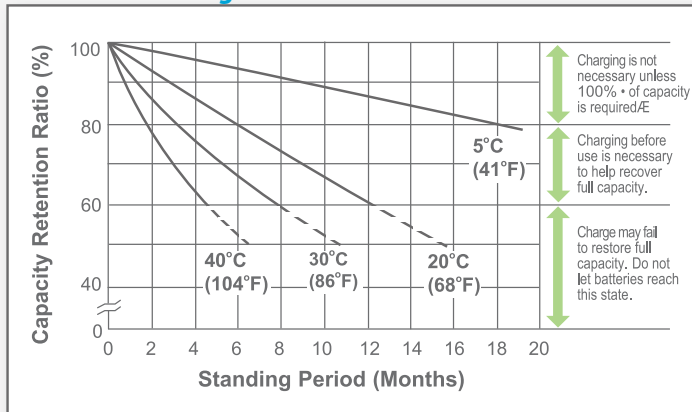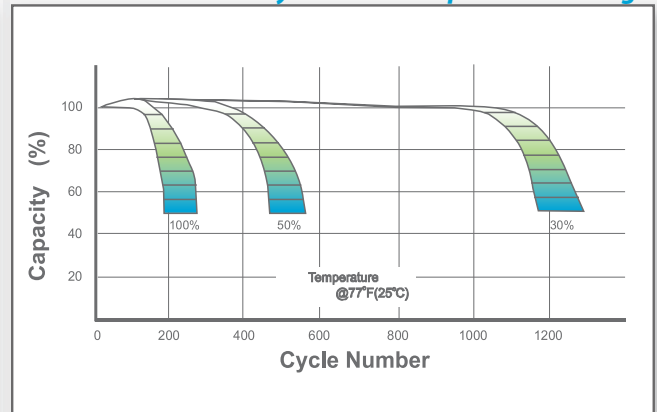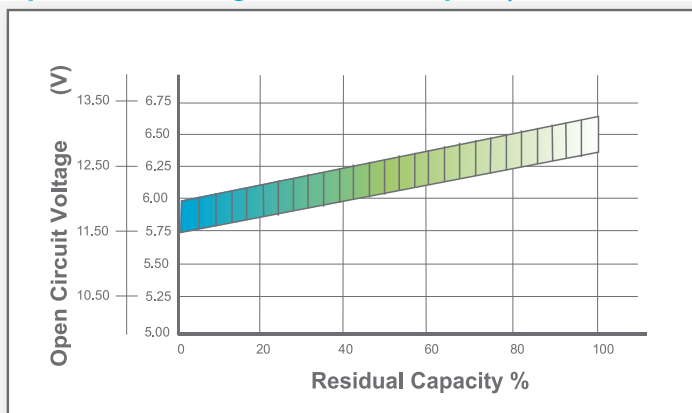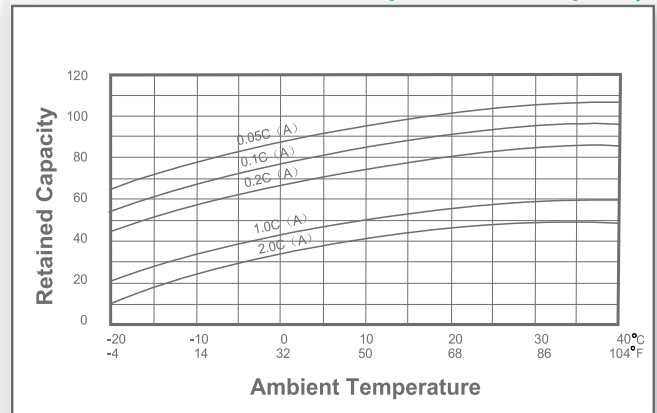Shelf Life & Storage**Cycle Life vs Depth of Discharge****Open Circuit Voltage vs Residual Capacity****Effect of Temperature on Capacity****Charge Current & Final Discharge Voltage**

Application	Charge Voltage(V/Cell)			Max.Charge Current	Final Discharge Voltage V/Cell	1.75	1.70	1.60	1.30
	Temperature	Set Point	Allowable Range						
Cycle Use	25°C(77°F)	2.45	2.40~2.50	0.30C	Discharge Current(A)	0.2C>(A)	0.2C<(A)<0.5C	0.5C<(A)<1.0C	(A)>1.0C
Standby	25°C(77°F)	2.30	2.27~2.30						