

UPG Sealed Lead-Acid Battery

STAY POWERED®

Absorbant Glass Mat (AGM) technology for superior performance. Valve regulated, spill proof construction allows safe operation in any position. Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified. U.L. recognized under file number MH 20567.

UPG No. 40565

UB645

Maintenance-Free



Due to continuous improvements to our products, product may vary slightly from depiction.

Specification

Nominal Voltage	6 volts		
Nominal Capacity	77° F (25° C)		
20-hr. (0.23A)	4.50 Ah		
10-hr. (0.42A)	4.19 Ah		
5-hr. (0.77A)	3.83 Ah		
1-hr. (2.70A)	2.70 Ah		
Approximate Weight	1.59 lbs (0.7 kg)		
Internal Resistance (approx.)	28mΩ		
Shelf Life (% of normal capacity at 68° F (20° C))			
3 Months	6 Months	12 Months	
91%	83%	64%	
Temperature Dependency of Capacity	(20 hour rate)		
104° F	77° F	32° F	5° F
102%	100%	85%	65%
AGM Operational Temperature			
Charge	32°F to 104°F (0°C to 40°C)		
Discharge	5°F to 113°F (-15°C to 45°C)		
AGM Storage Temperature	5°F to 104°F (-15°C to 40°C)		

Charge Method (Constant Voltage)

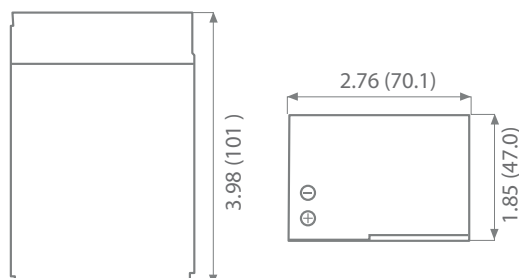
Cycle Use (Repeating Use)

Initial Current	1.35 A or smaller
Control Voltage	7.3 - 7.4 V

Float Use

Control Voltage	6.8 - 6.90V
-----------------	-------------

Physical Dimensions: in (mm)




L: 2.76 in (70.1 mm)
W: 1.85 in (47.0 mm)
H: 3.98 in (101 mm)
TH: 3.98 in (101 mm)

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.


Terminals





6.5" Wire Lead

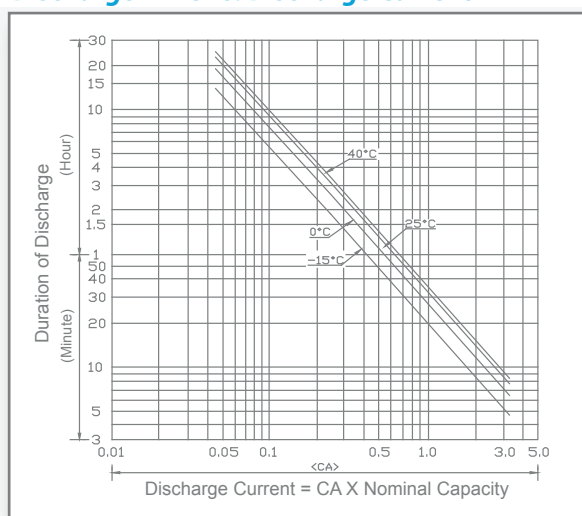Discharge Time vs. Discharge Current



Discharge Characteristics

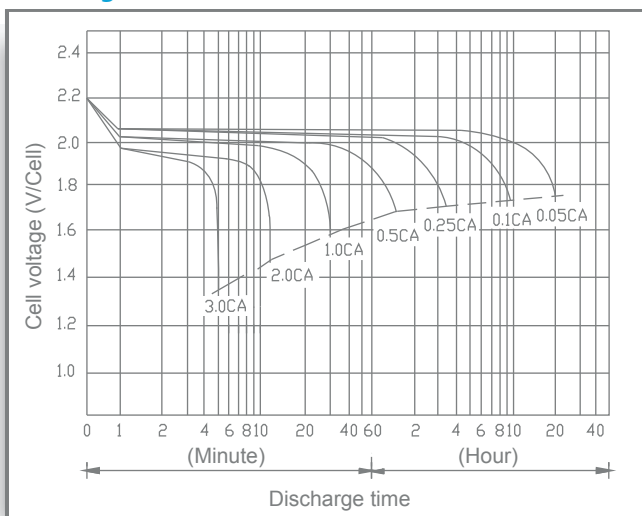

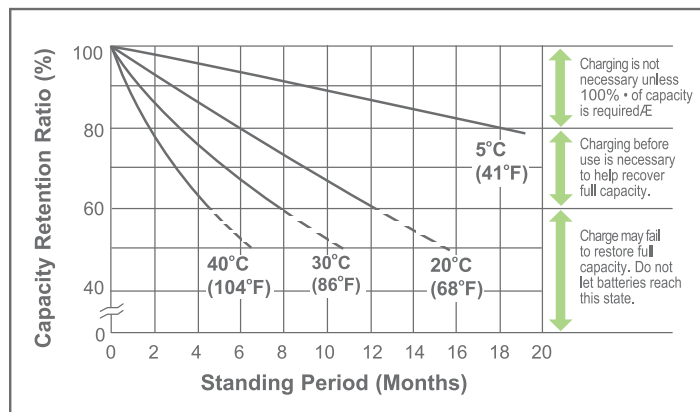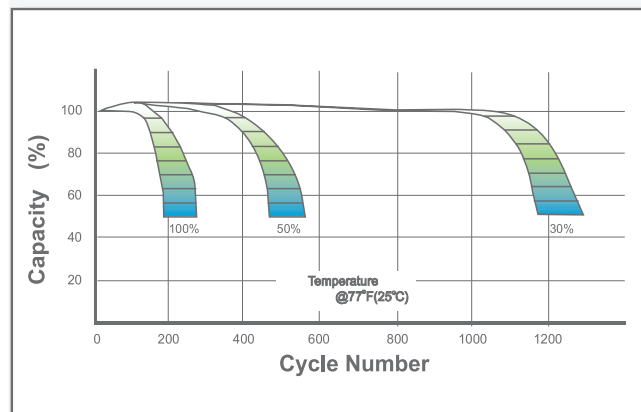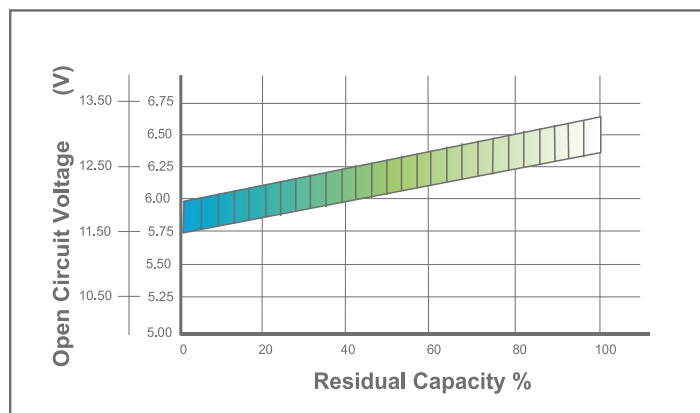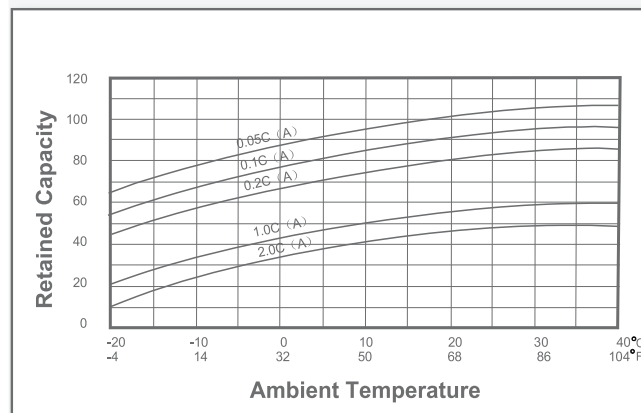Shelf Life & Storage**Cycle Life vs Depth of Discharge****Open Circuit Voltage vs Residual Capacity****Effect of Temperature on Capacity****Charge Current & Final Discharge Voltage**

Application	Charge Voltage (V/Cell)			Max. Charge Current	Final Discharge Voltage V/Cell	1.75	1.70	1.60	1.30
	Temperature	Set Point	Allowable Range						
Cycle Use	25°C(77°F)	2.45	2.43~2.47	0.30C	Discharge Current (A)	0.2C>(A)	0.2C<(A)<0.5C	0.5C<(A)<1.0	(A)>1.0C
Standby	25°C(77°F)	2.28	2.27~2.30						